


OVATION

TOP CONSTRUCTION

- SUBSTRATE:** Standard table tops are constructed with 1-1/8" M3 Industrial Grade 47# density particle board. NAUF and FSC® options are available.
- DECORATIVE SURFACE:** Constructed with HPL (high pressure laminate) which meets or exceeds performance requirements of NEMA LD 3
- BACKER:** Backer matched grade of laminate for balanced construction. Meets or exceeds performance requirements of NEMA LD 3
- ADHESIVE:** GREENGUARD® Certified Water-Based PVA glue
- EDGING:** See edge treatment guide for more information on edging options www.surfaceworks.us/Edges.html
- MOUNTING:** Table tops are predrilled for easy installation & alignment.

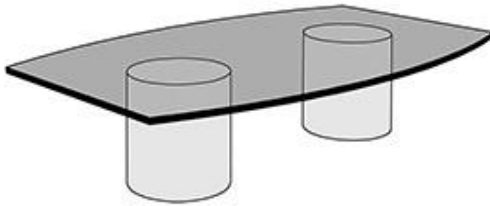

BASE CONSTRUCTION

- DESCRIPTION:** Fiberboard cylinder, 3/8" wall thickness. Laminated w/HPL. 3/4" particle board ring at top and bottom for structure and stability
- MATERIAL:** Laminated fiberboard cylinder, 3/8" wall thickness and 3/4" particle board ring at top and bottom for structure and stability
- FINISH:**
- HEIGHT:** 27.75"
- FOOT TYPE (STANDARD):** (5) 1-3/8" diameter in steel inserts
- FOOT TYPE (OPTIONAL):FOOT TYPE (STANDARD):** Wire Access Panel
- MOUNTING PLATE:MOUNTING):** (4) 4"x 6" hardwood cleats per base