

SurfaceWorks®

Specification Sheet

Type: Rapport Basic Meeting Table

Table tops: Standard table tops are constructed with 1-1/8" M3 Industrial Grade 47# density particle board.

They are constructed with HPL (high pressure laminate) on the top side and a balanced backer on the bottom side for the greatest resistance to deflection. See the edge treatment guide for more information on table edging.

Base Construction: Bolted/ Welded

Base: Column- 11-gauge steel tube stock

Plate- 7-gauge steel with a 11-gauge steel gusset for increased stability

Options: Caster- 2" (50mm) diameter Hooded Twin Wheel Caster with brake

Glide- 5/16-18 x 1/2" zinc stem w/ 1-7/8" Blk base Glide

Base Height: Pub	40-3/4" X-BASE ONLY
Standard	27-3/4"
Coffee	13-3/4" X-BASE ONLY

Base Spread: T-Base	16"
	22"
	26"
X-Base	22"
	30"




SurfaceWorks®

Assembly Instructions - Rapport Basic Meeting Table

Parts list- Top with pre-drilled pattern
Rapport Basic legs or base
(2) 5/16-18 flat head bolts (X-Base Only)

Note: No assembly for Basic T-Base required (see step 3)

- 1) Set mounting plate on the floor with column up
Add Loctite to the threads of the 5/16-18" bolts
- 2) Position X-Base on the column with levelers up and tighten bolts
- 3) Place legs or base on pre-drilled pattern and secure with screws to finish assembly

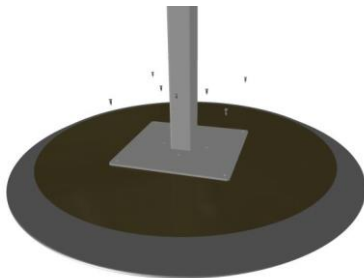


Step 3



Step 1



Step 2

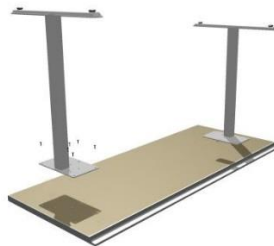

Step 3

